

# WAVASORB® CV

*Convolute Broadband Foam Absorber*

- ✓ WAVASORB® CV is a series of 3D-shaped light-weight foam absorbers.
- ✓ The front side has a convoluted shape which improves mono-static back-scattering performance, especially at higher frequencies.
- ✓ Due to its specific shape, the reflectivity level will degrade less compared to pyramidal absorbers for higher angles of incidence of the signal.

WITH RESPECT FOR THE ENVIRONMENT: REACH & RoHS COMPLIANT




# WAVASORB® CV

## Installation Methods and Chamber Validation

WAVASORB® CV is bonded to metallic surfaces using E&C Adhesive 13111 and thus can be supplied with metal backing and/or with E&C Adhesive 13111.

For easy exchange, modular installation techniques are available using velcro-fasteners to achieve perfect geometry and alignment, compatible with any type of shielding.

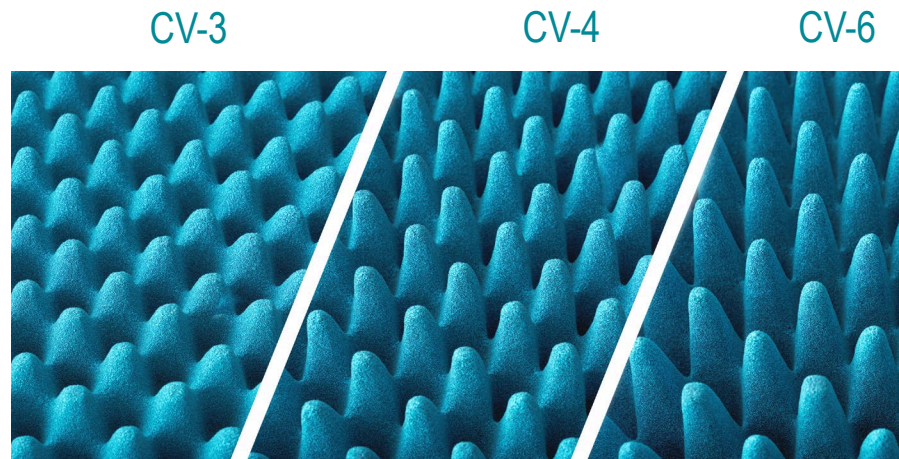

## Applications

WAVASORB® CV can be applied to:

- ✓ mount on removable walls in test areas;
- ✓ facilitate installation in application-specific areas;
- ✓ line areas nearby RF-systems to suppress reflections;
- ✓ refurbish absorber collars (shrouds) around the edges of high performance antennas;
- ✓ install in anechoic test boxes;
- ✓ cover metal structures in anechoic test environments;
- ✓ be used in small test boxes;
- ✓ be used for millimeter-wave applications.

*Multiple variables go with our WAVASORB® CV-absorbers, e.g. plastic coating, self-adhesive tape factory-installed, ... For more information on variables, contact [sales@ecac.be](mailto:sales@ecac.be)*


# WAVASORB® CV

## Characteristics

Handling Temperature <sup>(1)</sup>	+5°C to +35°C
Humidity Range	30% to 70%
Frequency Range	Typically above 2 GHz up to 40 GHz
Maximum Incident Power Density <sup>(2)</sup>	1,5 kW/m <sup>2</sup>
Fire Retardancy Tests	According to: - UL-94-HBF - ISO 4589 - EN 13501 - DIN 4102-1 Class B2 - NRL 8093 Tests 1, 2 and 3
Environmental Testing	Compliant with: - IEC 60068-2-1 - IEC 60068-2-78 - AATCC 30-IV (2004)
REACH compliant	According to EC 1907/2006
RoHS compliant	According to 2015/863/EU
Quality control	IEEE Standard 1128 ISO 9001
Product life	20+ years under controlled environment
Guarantee	5 years of RF performance under controlled environment

<sup>(1)</sup> Depending on the application, the absorber can withstand temperatures of +90°C, for more information, contact [sales@ecac.be](mailto:sales@ecac.be)

<sup>(2)</sup> High-Power Testing: 1,5 kW/m<sup>2</sup> for a continuous (CW) illumination with a duration of 20 minutes or less and better than 800 W/m<sup>2</sup> for a continuous (CW) illumination with a duration longer than 20 minutes

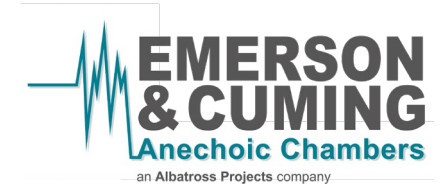

## Physical properties

	Standard Color <sup>(1)</sup>	Standard footprint
WAVASORB® CV-3 / CV-4 / CV-6	Light blue	61 cm x 61 cm

<sup>(1)</sup> Contrast colours available on request

	Total height <sup>(1)</sup> (cm)	Average weight <sup>(2)</sup> (kg)
WAVASORB® CV-3	6,7	1,2
WAVASORB® CV-4	10,0	1,6
WAVASORB® CV-6	15,2	2,5

<sup>(1)</sup> The above-mentioned dimensions have a tolerance of +/- 6 mm

<sup>(2)</sup> Weight values are subject to changes

## Typical Reflectivity Performance at Normal Incidence & Measurement Technique

The absorbers are measured in the set-ups made according to the IEEE recommendation 1128.

	TYPICAL REFLECTIVITY (dB)			
	2 GHz	4 GHz	6 GHz	8 GHz
WAVASORB® CV-3	- 13	- 24	- 26	- 38
WAVASORB® CV-4	- 17	- 28	- 38	- 40
WAVASORB® CV-6	- 23	- 55	- 56	- 52

\*For more information, contact 'sales@ecac.be'.

■  
E&C Anechoic Chambers nv  
Nijverheidsstraat 7A  
B-2260 Westerlo  
Belgium

Tel.: +32 14 59 58 00

sales@ecac.be  
www.ecac.be

■  
Albatross Projects RF Technology  
India Pvt. Ltd  
312, Siddhraj Zori, Near Sargasan Cross, KH-0,  
Off S.G. Highway  
Gandhinagar, 382421  
India

Tel.: +91 97 3737 9537  
Fax: +91 79 2975 0780

info@albatross-projects.in  
www.albatross-projects.in

■  
E&C Anechoic Chambers Asia Ltd.  
7K King Palace Plaza,  
55 King Yip Street, Kwun Tong  
Kowloon, Hong Kong

Tel.: +852 3975 9871

asia-sales@ecac.be  
www.ecac.be

■  
Albatross Projects RF Technology  
(Shanghai) Co., Ltd.  
Block 35, No. 100 Baise Road  
Inside Grand Skylight Gardens Hotel  
200231 Shanghai  
P.R. China

Tel.: +86 21 6434 1110  
Fax: +86 21 6434 7800

info@albatross-projects.com.cn  
www.albatross-projects.com.cn

■  
Albatross Projects GmbH  
Daimlerstrasse 17  
89564 Nattheim  
Germany

Tel.: +49 7321 730 500  
Fax: +49 7321 730 590

info@albatross-projects.com  
www.albatross-projects.com

■  
AP Americas Inc.  
18101 Ridgepoint Drive, Suite 107,  
75063 Irving, Texas  
USA

Tel.: +1 972 295 9100  
Fax: +1 972 810 3223

info@apamericas.com  
www.apamericas.com

BEST RESULTS FOR  
PIONEERING SUCCESS  
think global



www.ecac.be

Safety Considerations: It is recommended to consult the E&C ANECHOIC CHAMBERS product literature, including material safety data sheets, prior to use E&C ANECHOIC CHAMBERS products. These may be obtained from your local sales office.

Warranty: Values shown are based on testing of laboratory test specimens and represent data that falls within the normal range of properties of the material. These values are not intended for use in establishing maximum, minimum or ranges of values for specification purposes. Any determination of the suitability of the material or any use contemplated by the user and the manner of such use is the sole responsibility of the user who must assure that the material as subsequently processed meets the needs of this particular product or use.

We hope the information given here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale INCLUDING THOSE LIMITING WARRANTIES AND REMEDIES which apply to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions nor do we intend them as a recommendation for any use which would infringe any patent or copyright.